




*It's All about Building a  
Better Product for Our Clients!*

**J&M Fluidics, Inc.**  
851 Tech Drive  
Telford, PA 18969  
**Toll-Free: (888) 539-1731**  
**Fax: 267-203-8786**


**Model: IESA25D**

**Split-System Air-Cooled 25 Ton Chiller**

**STANDARD ON ALL J&M MODELS:**  
Idec Microprocessor Controller with  
Touch Screen Display.  
(Located inside front electrical cabinet)

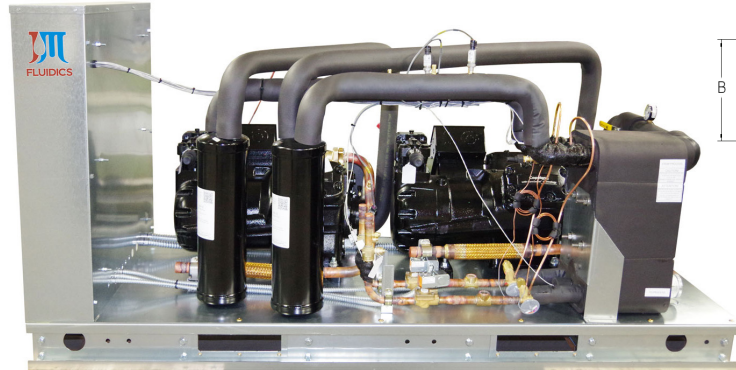

Indoor Chiller

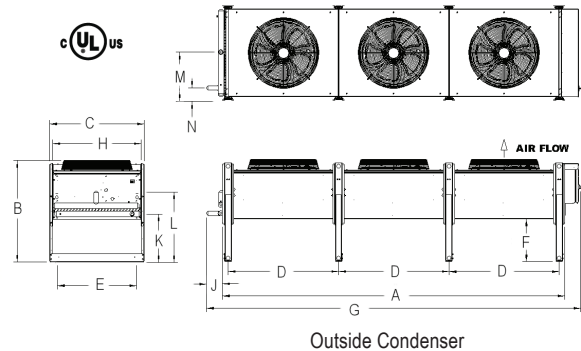

*\*Includes (Model OC25D)  
3 Fan – Outdoor Condenser*

**Standard Features:**

- ETL listed to UL1995 & CAN/CSA C22.2 No. 236-11, 4th edition, 10/14/2011
- Single Point Power Connection
- Pentra Microsmart, Programmable Logic Controller (PLC) with easy to use HMI touch screen display
- Data Recording Memory Card
- STAINLESS STEEL, brazed plate evaporator
- SEMI-HEMETIC compressor with crankcase heater and vibration spring mounting kit
- Compressor discharge and suction pipe vibration eliminators
- Suction Accumulator
- Liquid sight-glass, solenoid, TXV and replaceable core drier
- Water flow switch
- 24V control transformer
- Fan cycle control (+40°F)
- Direct drive condenser fan motor
- Rust resistant, high CFM, aluminum condenser fan blade
- Condenser(s): copper tube/aluminum fin, Floating Tube™
- 5 year condenser warranty against tube sheet leaks
- Compressor motor contactor
- Individual condenser motor contactors and fusing
- Condenser control panel with factory mounted door interrupt disconnect switch
- Galvanized steel sheet metal cabinet
- 1/2 inch insulation on all water and refrigerant lines
- Operating Refrigerant charge from factory
- Factory Performance Test prior to shipment



**Easy to Use Touch  
Screen Display on  
ALL J&M Chiller Models**

**Options:**

- Compressor Cylinder Unloading
- Remote Idec touchscreen control panel
- Industrial VPN Router
- 5 Port Ethernet Switch
- BacNet Gateway
- Process Pump VFD Controller
- 4 year extended compressor warranty
- 115 volt (rain tight) service outlet
- Non Fused Disconnect
- Phase Monitor, line voltage monitor offering protection against phase loss/reversal, unbalance and hi/lo voltage
- Compressor fusing
- Compressor Sound Cover
- Flooded cond. w/receiver/head pressure control (0°F)
- Heated, flooded cond. w/receiver/head pressure control (-20°F)
- Factory installed evaporator heat tape freeze protection
- Fused, STAINLESS STEEL process pump
- Dual process pump with manual changeover
- Dual process pump with auto changeover
- Pump suction isolation valve
- Water pressure gauge set
- Water Flow Meter
- Copper finned condenser coil (coastal protection)
- BohnGuard™ coated condenser coil (coastal protection)
- Epoxy or Phenolic coated fins (coastal protection)
- Door Mounted HMI with weather proof cover

J&M FLUIDICS, INC. – PRODUCT DATA SHEET



*It's All about Building a Better Product for Our Clients!*

**J&M Fluidics, Inc.**

851 Tech Drive  
Telford, PA 18969

Toll-Free: (888) 539-1731

Fax: 267-203-8786


# Model: IESA25D

## Split-System Air-Cooled 25 Ton Chiller

### Product Dimensional Drawing

© Property of J&M Fluidics, Inc.

*\*Includes (Model OC25D)  
3 Fan – Outdoor Condenser*

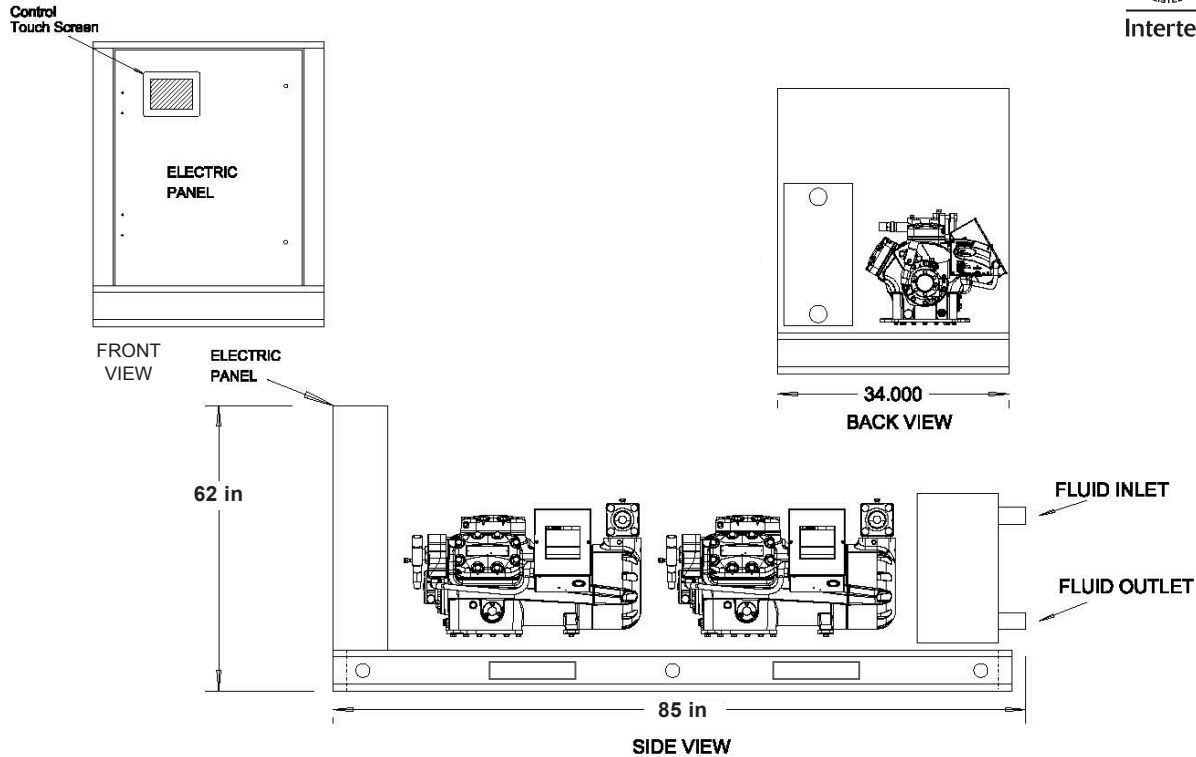

### Dimensional & Electrical Table (Dual Circuit)

Chiller Models	Length Inches	Width Inches	Height Inches	Power			Compressor		RLA ea.	LRA ea.	Fan Motor		MCA	M.O.P	Chiller Fluid Conn.	Weight Pounds
				Voltage	Phase	Freq.	Qty.	HP			Qty.	FLA.				
IESA25DF5	85	34	62	208/230V	3	60Hz	2	15	53.5	275	3	7	150	175	2" MPT	1400
IESA25DH5				460V	3	60Hz			26.0	138		3.5	70	90		
IESA25DI5				575V	3	60Hz			21.2	110		2.8	60	70		

### Outside Condenser Specs (OC)

Outside Condenser	Length Inches	Width Inches	Height Inches	Fan Motor		Refrigerant Conn.		Weight Pounds
				Qty.	HP	Discharge	Liquid	
OC25D	180	45.56	49.13	3	1.5	1 1/8"	5/8"	930

### Capacity Table (Refrigerant R407C)

Model	Compressor	LWT °F	80°F			90°F			95°F			100°F			105°F		
			TONS	KW	EER	TONS	KW	EER	TONS	KW	EER	TONS	KW	EER	TONS	KW	EER
25D	3DS3R17ME	42.0	28.0	25.8	10.3	26.0	28.3	8.9	25.1	29.4	8.3	24.2	30.6	7.7	23.3	31.7	7.2
		44.0	29.3	26.0	10.7	27.2	28.5	9.2	<b>26.2</b>	<b>29.8</b>	<b>8.6</b>	25.3	31.0	8.0	24.3	32.2	7.4
		45.0	30.7	26.1	10.9	27.8	28.7	9.4	26.8	29.9	8.7	25.8	31.2	8.1	24.8	32.4	7.5
		50.0	33.2	26.4	12.0	30.8	29.2	10.2	29.6	30.6	9.5	28.5	32.0	8.8	27.4	33.3	8.1

- Capacities on this chart are based on refrigerant R407C. Lower leaving water or low ambient can require the use of a glycol solution or other fluid blends. These solutions affect unit capacities. Please consult the factory on these or other special fluids.
- KW input is for compressor(s) only.
- EER = Energy Efficiency Ratio (BTU/watt-hour). Power inputs include compressor (s), condenser fan motor (s) and control power.