


It's All about Building a Better Product for Our Clients!

J&M Fluidics. Inc. 851 Tech Drive Telford, PA 18969

Toll-Free: (888) 539-1731 Fax: 267-203-8786

Model: PSW45D

Packaged Water-Cooled 45 Ton Chiller

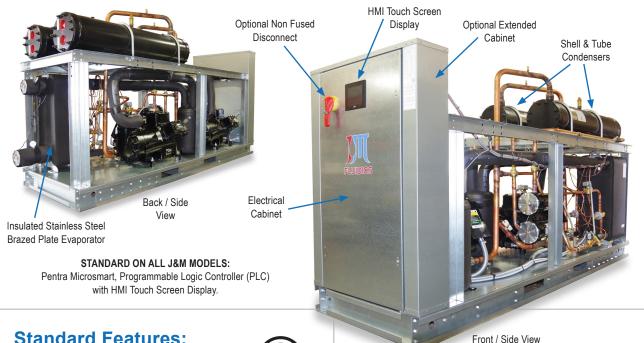

Standard Features:

 ETL listed to UL1995 & CAN/CSA C22.2 No. 236-11, 4th edition, 10/14/2011



- Semi Heremtic compressors with crankcase heater
- IDEC Microprocessor controller with touch screen interface
- STAINLESS STEEL brazed plate evaporator
- Shell & Tube Condensers
- Suction accumulator
- Water flow switch
- Liquid line drier, sightglass, solenoid, TEV
- 1/2" insulation on all water and refrigerant lines
- Full refrigerant charge from factory
- NEMA 3R Control Panel
- 24V control transformer
- Compressor motor contactor
- Control circuit fusing
- Galvanized framed cabinet
- · Computerized factory run test under load conditions prior to shipment



Easy to Use Touch Screen Display on ALL J&M Chiller Models

Options:

- Fused STAINLESS STEEL system process pump
- Condenser water regulation valves (shipped loose)
- Water pressure gauge set
- Factory installed evaporator heat tape freeze protection thermostatically controlled
- Compressor fusing
- 4 Year extended compressor warranty
- 115 volt service outlet (rain tight)
- Fused disconnect (shipped loose)
- Phase monitor



It's All about Building a Better Product for Our Clients!

J&M Fluidics, Inc. 851 Tech Drive Telford, PA 18969

Toll-Free: (888) 539-1731 Fax: 267-203-8786

Model: PSW45D


Packaged Water-Cooled 45 Ton Chiller


Product Dimensional Drawing


© Property of J&M Fluidics, Inc.




Product Dimensional Drawing

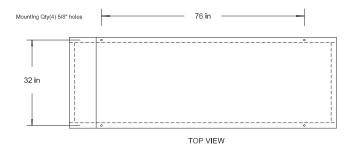



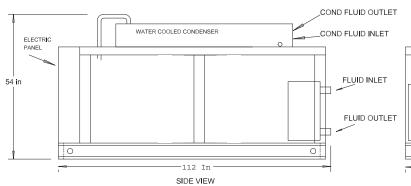



Dimensional & Electrical Table (Dual Circuit)

Chiller Models	85°F Cond Water 45°F LWT	Length Inches	Width Inches	Height Inches	Power		Compressor		RLA	LRA			Chiller	Weight	
					Voltage	Phase	Freq.	Qty.	HP	ea.	ea.	MCA	M.O.P	Fluid Conn.	Pounds
PSW45DF5	638,000	112	34	54	208/230V	3	60Hz	2	25	110.3	565	250	350	2.5" FPT	2240
PSW45DH5					460V	3	60Hz			55.8	260	150	175		
PSW45DI5					575V	3	60Hz			44.9	230	110	125		

Capacity Table (Refrigerant R407C)

Model	Compressor	LWT	105°F				
Model	Compressor	°F	TONS	KW	EER		
		42.0	50.2	47.6	12.65		
45D	6DBNR32ME	44.0	52.2	48.0	13.04		
430		45.0	53.2	48.2	13.24		
		50.0	58.2	48.6	14.36		