## It's All about Building a Better Product for Our Clients!

Intertek

J&M Fluidics, Inc. 851 Tech Drive Telford, PA 18969

Toll-Free: (888) 539-1731 Fax: 267-203-8786

# Model: PZW26D

### Packaged Water-Cooled 26 Ton Chiller

STANDARD ON ALL J&M MODELS: Pentra Microsmart, Programmable

FLUIDICS

Logic Controller (PLC) with HMI Touch Screen Display. Shown with Custom Chiller Barrel



## **Standard Features:**


- ETL listed to UL1995 & CAN/CSA C22.2 No. 236-11, 4th edition, 10/14/2011
- Single Point Power Connection
- Pentra Microsmart, Programmable Logic Controller (PLC) with easy to use HMI touch screen display
- STAINLESS STEEL, brazed plate evaporator
- · Scroll compressor with crankcase heater
- Suction Accumulator
- · Water flow switch
- Hot Gas Bypass Capacity Control
- 24V control transformer
- · Control circuit fusing
- Condenser(s): Coaxial up to PZW22D
- Condenser(s): Shell and Tube PZW26D
  through PZW52D
- Compressor motor contactor
- Galvanized steel metal frame
- 1/2" insulation on all water and refrigerant lines
- Liquid line drier, sight glass, solenoid, TXV
- Complete refrigerant charge from factory
- Factory Performance Test prior to shipment



Easy to Use Touch Screen Display on ALL J&M Chiller Models

### Options:

- Remote Idec touchscreen control panel
- Industrial VPN Router
- 5 Port Ethernet Switch
- BacNet Gateway
- Process Pump VFD Controller
- VFD Compressor Control
- 4 year extended compressor warranty
- Casters (factory mounted)
- Condenser water regulating valve
- 115 volt (rain tight) service outlet
- Non Fused Disconnect
- Phase Monitor, line voltage monitor offering protection against phase loss/reversal, unbalance and hi/lo voltage
- Compressor fusing
- Compressor Sound Cover
- Factory installed evaporator heat tape freeze protection
- · Low flow by-pass valve
- Fused, STAINLESS STEEL process pump
- Pump suction isolation valve
- Water pressure gauge set
- Water Flow Meter
- Auto city water changeover panel with filter
- Door Mounted HMI with weather proof cover

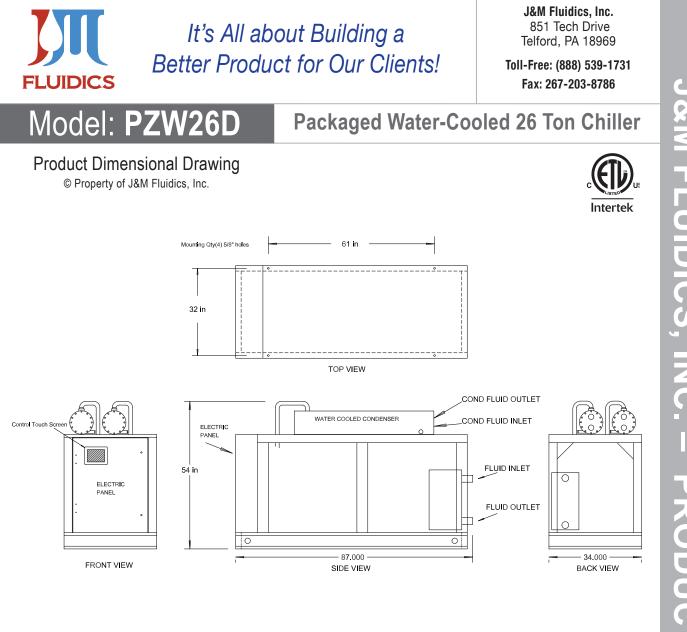

#### **Dimensional & Electrical Table (Dual Circuit)**

Chiller Models	Length Inches	Width Inches	Height Inches	Power			Compressor		RLA	LRA			Chiller	Weight
				Voltage	Phase	Freq.	Qty.	HP	ea.	ea.	MCA	M.O.P	Fluid Conn.	Pounds
PZW26DF5	_	34	54	208/230V	3	60Hz	2	15	53.8	340	125	175	2" MPT	1950
PZW26DH5				460V	3	60Hz			28.2	173	70	90		
PZW26DI5				575V	3	60Hz			22.4	132	60	70		

#### Capacity Table (Refrigerant R407C)

Model	Compressor	LWT	105°F Condensing				
Model	Compressor	°F	TONS	KW	EER		
		42.0	25.5	24.9	12.7		
26D	ZB114KCE	44.0	26.7	25.0	11.2		
200	ZB114NCE	45.0	27.3	25.1	13.4		
		50.0	30.3	25.4	14.7		