



*It's All about Building a  
Better Product for Our Clients!*

**J&M Fluidics, Inc.**  
851 Tech Drive  
Telford, PA 18969  
**Toll-Free: (888) 539-1731**  
**Fax: 267-203-8786**

**Model: PZW2.5S**

**Packaged Water-Cooled 2.5 Ton Chiller**

**STANDARD ON ALL J&M MODELS:**  
Pentra Microsmart, Programmable Logic Controller (PLC)  
with HMI Touch Screen Display.

User-Friendly  
HMI Touch Screen  
Display



Front/Side View



Front View

### Standard Features:

- ETL listed to UL1995 & CAN/CSA C22.2 No. 236-11, 4th edition, 10/14/2011
- Single Point Power Connection
- Pentra Microsmart, Programmable Logic Controller (PLC) with easy to use HMI touch screen display
- **STAINLESS STEEL**, brazed plate evaporator
- Scroll compressor with crankcase heater
- Suction Accumulator
- **Water flow switch**
- **Hot Gas Bypass Capacity Control**
- **24V control transformer**
- Control circuit fusing
- Condenser(s): Coaxial up to PZW22D
- Condenser(s): Shell and Tube PZW26D through PZW52D
- Compressor motor contactor
- **Painted - Powder Coated** (up to PZW22D), **galvanized sheet metal cabinet**
- 1/2" insulation on all water and refrigerant lines
- Liquid line drier, sight glass, solenoid, TXV
- Complete refrigerant charge from factory
- **Factory Performance Test prior to shipment**



### Options:

- Copeland Digital Scroll Compressor
- Remote Idec touchscreen control panel
- Industrial VPN Router
- 5 Port Ethernet Switch
- BacNet Gateway
- Process Pump VFD Controller
- VFD Compressor Control
- 4 year extended compressor warranty
- Casters (factory mounted)
- Condenser water regulating valve
- 115 volt (rain tight) service outlet
- Non Fused Disconnect
- Phase Monitor, line voltage monitor offering protection against phase loss/reversal, unbalance and hi/lo voltage
- Compressor fusing
- Compressor Sound Cover
- Factory installed evaporator heat tape freeze protection
- Low flow by-pass valve
- Fused, STAINLESS STEEL process pump
- Dual system pump with manual changeover (some models)
- Dual system pump with auto changeover (some models)
- Pump suction isolation valve
- Water pressure gauge set
- Water Flow Meter
- Auto city water changeover panel with filter
- Stainless steel, SCH80 PVC or Polypropylene piping for deionized and reverse osmosis water systems
- Door Mounted HMI with weather proof cover



*Easy to Use  
Touch Screen Display  
on ALL J&M Chiller  
Models*



*It's All about Building a Better Product for Our Clients!*

**J&M Fluidics, Inc.**

851 Tech Drive  
Telford, PA 18969

Toll-Free: (888) 539-1731


Fax: 267-203-8786

# Model: PZW2.5S

## Packaged Water-Cooled 2.5 Ton Chiller

### Product Dimensional Drawing

© Property of J&M Fluidics, Inc.

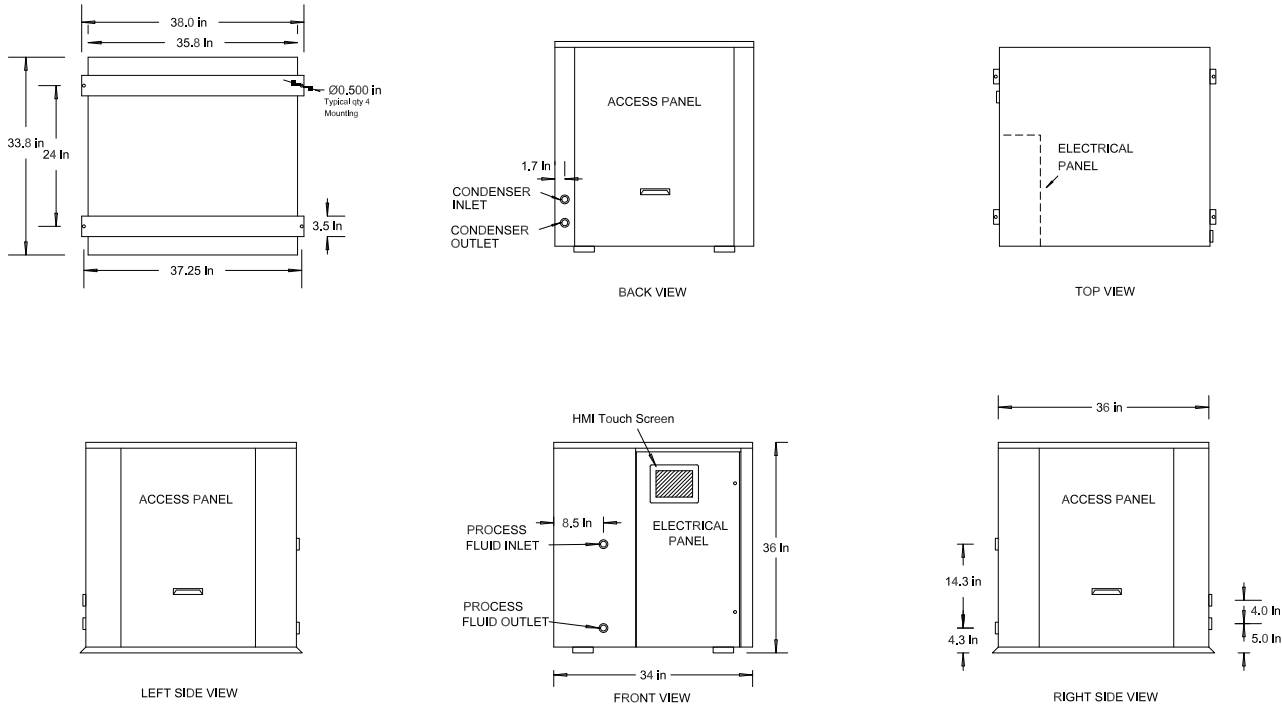

### Dimensional & Electrical Table (Single Circuit)

Chiller Models	Length Inches	Width Inches	Height Inches	Power			Compressor		RLA ea.	LRA ea.	MCA	M.O.P	Chiller Fluid Conn.	Weight Pounds
				Voltage	Phase	Freq.	Qty.	HP						
PZW2.5SE5	36	34	36	208/230V	1	60Hz	1	3.5	19.9	104	25	40	1" FPT	245
PZW2.5SF5				208/230V	3	60Hz			12.8	93	20	25		
PZW2.5SH5				460V	3	60Hz			5.8	48	15	15		
PZW2.5SI5				575V	3	60Hz			4.7	38	15	15		

### Capacity Table (Refrigerant R407C)

Model	Compressor	LWT °F	105°F Condensing		
			TONS	KW	EER
2.5S	ZS26KAE	42.0	2.98	2.56	14.4
		44.0	3.09	2.55	15.0
		45.0	3.16	2.55	15.3
		50.0	3.48	2.51	17.2

- Capacities on this chart are based on refrigerant R407C. Lower leaving water or low ambient can require the use of a glycol solution or other fluid blends. These solutions affect unit capacities. Please consult the factory on these or other special fluids.
- KW input is for compressor(s) only.
- EER = Energy Efficiency Ratio (BTU/watt-hour). Power inputs include compressor (s), condenser fan motor (s) and control power.