## J&M Fluidics. Inc. 851 Tech Drive It's All about Building a Telford, PA 18969 **Better Product for Our Clients!** Toll-Free: (888) 539-1731 **FLUIDICS** Fax: 267-203-8786 Model: PZW52D Packaged Water-Cooled 52 Ton Chiller STANDARD ON ALL J&M MODELS: Pentra Microsmart, Programmable Logic Controller (PLC) Shown with Custom Chiller Barrel with HMI Touch Screen Display. Flectrical Cabinet **Standard Features: Options:** • ETL listed to UL1995 & CAN/CSA

C22.2 No. 236-11, 4th edition, 10/14/2011




- Single Point Power Connection
- Idec microprocessor controller with easy to use touch screen display
- STAINLESS STEEL, brazed plate evaporator
- Scroll compressor with crankcase heater
- Suction Accumulator
- · Water flow switch
- Hot Gas Bypass Capacity Control
- 24V control transformer
- Control circuit fusing
- Condenser(s): Coaxial up to PZW22D
- Condenser(s): Shell and Tube PZW26D through PZW52D
- Compressor motor contactor
- Galvanized steel metal frame
- 1/2" insulation on all water and refrigerant lines
- Liquid line drier, sight glass, solenoid, TXV
- Complete refrigerant charge from factory
- Factory Performance Test prior to shipment



Easy to Use Touch Screen Display on ALL J&M Chiller Models

- Remote Idec touchscreen control panel
- Industrial VPN Router
- 5 Port Ethernet Switch
- BacNet Gateway
- Process Pump VFD Controller
- VFD Compressor Control
- 4 year extended compressor warranty
- Casters (factory mounted)
- · Condenser water regulating valve
- 115 volt (rain tight) service outlet
- Non Fused Disconnect
- · Phase Monitor, line voltage monitor offering protection against phase loss/reversal, unbalance and hi/lo voltage
- Compressor fusing
- Compressor Sound Cover
- · Factory installed evaporator heat tape freeze protection
- Low flow by-pass valve
- Fused, STAINLESS STEEL process pump
- Pump suction isolation valve
- Water pressure gauge set
- · Water Flow Meter
- Auto city water changeover panel with filter
- Door Mounted HMI with weather proof cover

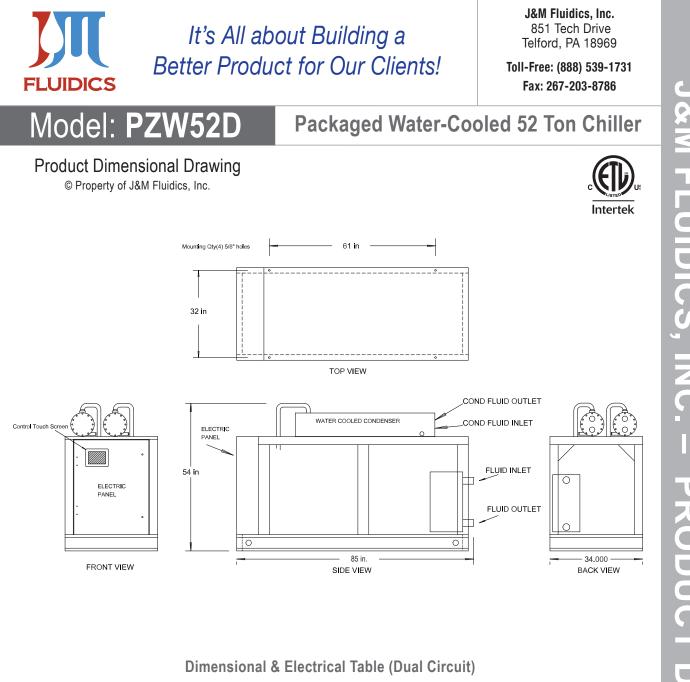

Chiller Models	Length Inches	Width Inches	Height Inches	Power			Compressor		RLA	LRA			Chiller	Weight
				Voltage	Phase	Freq.	Qty.	HP	ea.	ea.	MCA	M.O.P	Fluid Conn.	Pounds
PZW52DF5	85	34	54	208/230V	3	60Hz	2	30	121.4	599	300	350	2.5" MPT	2500
PZW52DH5				460V	3	60Hz			59.3	310	150	175		
PZW52DI5				575V	3	60Hz			47.1	239 1 <sup>-</sup>	110	150		

## Capacity Table (Refrigerant R407C)

Model	Compressor	LWT	105°F Condensing				
Model	Compressor	°F	TONS	KW	EER		
		42.0	52.7	49.0	13.3		
52D	ZR380KCE	44.0	55.0	49.2	13.9		
520	ZRJOUNUE	45.0	56.2	49.4	14.1		
		50.0	62.3	49.8	15.5		