



*It's All about Building a
Better Product for Our Clients!*

J&M Fluidics, Inc.
851 Tech Drive
Telford, PA 18969
Toll-Free: (888) 539-1731
Fax: 267-203-8786

Model: PZWT9S

Packaged Water-Cooled 9 Ton Chiller

with Stainless Steel Tank



Standard Features:

- ETL listed to UL1995 & CAN/CSA C22.2 No. 236-11, 4th edition, 10/14/2011
- Single Point Power Connection
- Pentra Microsmart, Programmable Logic Controller (PLC) with easy to use HMI touch screen display
- STAINLESS STEEL, brazed plate evaporator
- Scroll compressor with crankcase heater
- Suction Accumulator
- Water flow switch
- Hot Gas Bypass Capacity Control
- 24V control transformer
- Control circuit fusing
- Condenser(s): Coaxial up to PZW22D
- Condenser(s): Shell and Tube PZW26D through PZW52D
- Compressor motor contactor
- Painted - Powder Coated (Most Models), galvanized sheet metal cabinet
- 1/2" insulation on all water and refrigerant lines
- Liquid line drier, sight glass, solenoid, TXV
- Complete refrigerant charge from factory
- Factory Performance Test prior to shipment



Tank

- STAINLESS STEEL storage tank with 1/2 inch insulation
- Fused, STAINLESS STEEL re-circulation pump for tank operation with ball valve and cleanable strainer
- Tank pressure relief valve, vent and drain hose bibs



*Easy to Use
Touch Screen Display
on ALL J&M Chiller
Models*

Options:

- Copeland Digital Scroll Compressor
- Remote Idec touchscreen control panel
- Industrial VPN Router
- 5 Port Ethernet Switch
- BacNet Gateway
- Process Pump VFD Controller
- VFD Compressor Control
- 4 year extended compressor warranty
- Casters (factory mounted)
- Condenser water regulating valve
- 115 volt (rain tight) service outlet
- Non Fused Disconnect
- Phase Monitor, line voltage monitor offering protection against phase loss/reversal, unbalance and hi/lo voltage
- Compressor fusing
- Compressor Sound Cover
- Factory installed evaporator heat tape freeze protection
- Low flow by-pass valve
- Fused, STAINLESS STEEL process pump
- Dual system pump with manual changeover (some models)
- Dual system pump with auto changeover (some models)
- Pump suction isolation valve
- Water pressure gauge set
- Water Flow Meter
- Auto city water changeover panel with filter
- Tank City Water Makeup
- Stainless steel, SCH80 PVC or Polypropylene piping for deionized and reverse osmosis water systems
- Door Mounted HMI with weather proof cover

Tank Options

- Storage tank sight glass
- Tank low liquid level indicator with dry contacts

J&M FLUIDICS, INC. – PRODUCT DATA SHEET



It's All about Building a Better Product for Our Clients!

J&M Fluidics, Inc.

851 Tech Drive
Telford, PA 18969

Toll-Free: (888) 539-1731

Fax: 267-203-8786







Model: PZWT9S

Packaged Water-Cooled 9 Ton Chiller

Product Dimensional Drawing

© Property of J&M Fluidics, Inc.

with Stainless Steel Tank

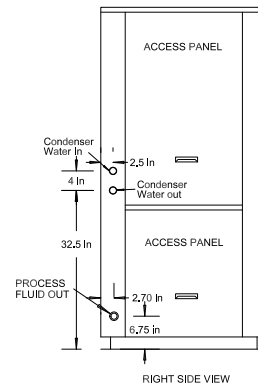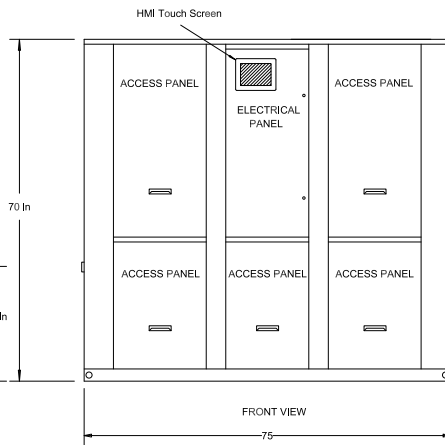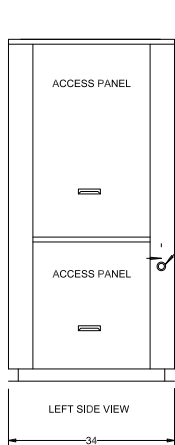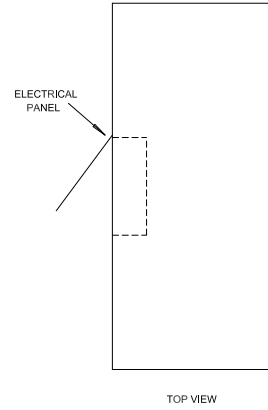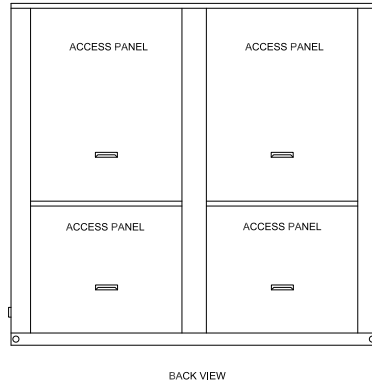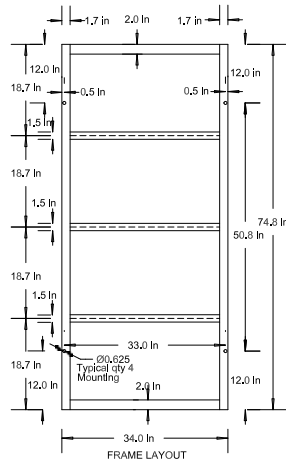

Dimensional & Electrical Table (Single Circuit)

| Chiller Models | Length Inches | Width Inches | Height Inches | Power | | | Compressor | | RLA ea. | LRA ea. | Recirculation Pump FLA | MCA | M.O.P. | Reservoir Gal. | Chiller Fluid Conn. | Weight Pounds |
|----------------|---------------|--------------|---------------|----------|-------|-------|------------|----|---------|---------|------------------------|-----|--------|----------------|---------------------|---------------|
| | | | | Voltage | Phase | Freq. | Qty. | HP | | | | | | | | |
| PZWT9SF5 | 75 | 34 | 70 | 208/230V | 3 | 60Hz | 1 | 10 | 37.2 | 239 | 7.9 | 60 | 90 | 80 | 1.25" FPT | 1050 |
| PZWT9SH5 | | | | 460V | 3 | 60Hz | | | 17.2 | 125 | 2.5 | 25 | 40 | | | |
| PZWT9SI5 | | | | 575V | 3 | 60Hz | | | 12.4 | 80 | 1.8 | 20 | 25 | | | |

Capacity Table (Refrigerant R407C)

| Model | Compressor | LWT °F | 105°F Condensing | | |
|-------|------------|--------|------------------|------|------|
| | | | TONS | KW | EER |
| 9S | ZB76KCE | *42.0 | 7.97 | 8.02 | 13.9 |
| | | *44.0 | 8.33 | 8.04 | 14.5 |
| | | 45.0 | 8.50 | 8.05 | 14.8 |
| | | 50.0 | 9.46 | 8.09 | 16.3 |

* = Requires the use of glycol.