

Front View showing Access Doors Removed


## (Polyethylene Tank) Standard Features:

- Open Vented 300 gallon
  Polyethylene tank
- 1/2" tank and fluid piping insulation
- Copper & Polypropylene piping
- Fused, **STAINLESS STEEL** evaporator recirculating pump
- Recirculation pump discharge ball valve and cleanable "Y" strainer
- Control box with pump terminal block
- Galvanized steel sheet metal cabinet
- Hinged removable access panels

## Available Options:

- STAINLESS STEEL SEALED TANK
- Fused, STAINLESS STEEL process pump
- Dual process pump with manual changeover
- · Dual process pump with auto changeover
- Pump suction isolation valve
- Process Pump VFD Controller
- Tank fluid sight glass
- Tank liquid level indicator with dry contacts
- · Low flow by-pass valve
- Water flow meter
- Auto city water make up solenoid
- 1" tank and piping insulation in lieu of 1/2"
- · Seal-tight electrical conduit and connections
- Painted Powder Coated



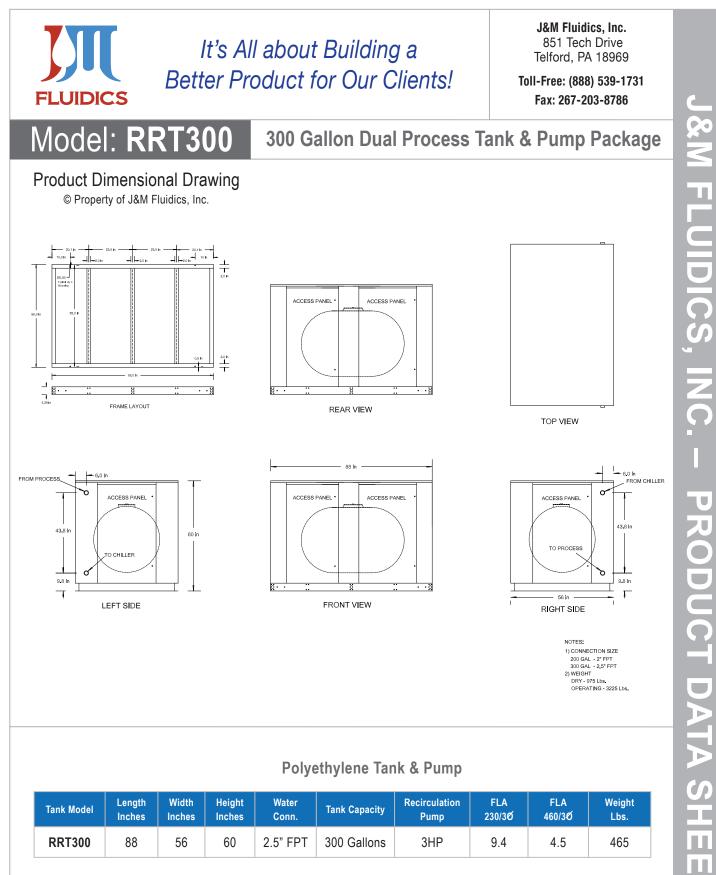

**Polyethylene Tank & Pump** 

Tank Model	Length Inches	Width Inches	Height Inches	Water Conn.	Tank Capacity	Recirculation Pump	FLA 230/3Ø	FLA 460/3Ø	Weight Lbs.
RRT300	88	56	60	2.5" FPT	300 Gallons	3HP	9.4	4.5	465