



*It's All about Building a
Better Product for Our Clients!*


J&M Fluidics, Inc.
851 Tech Drive
Telford, PA 18969
Toll-Free: (888) 539-1731
Fax: 267-203-8786

Model: RST200

200 Gallon Storage Tank



1/2" Tank and Fluid
Piping Insulation
(Optional 1" Thickness)

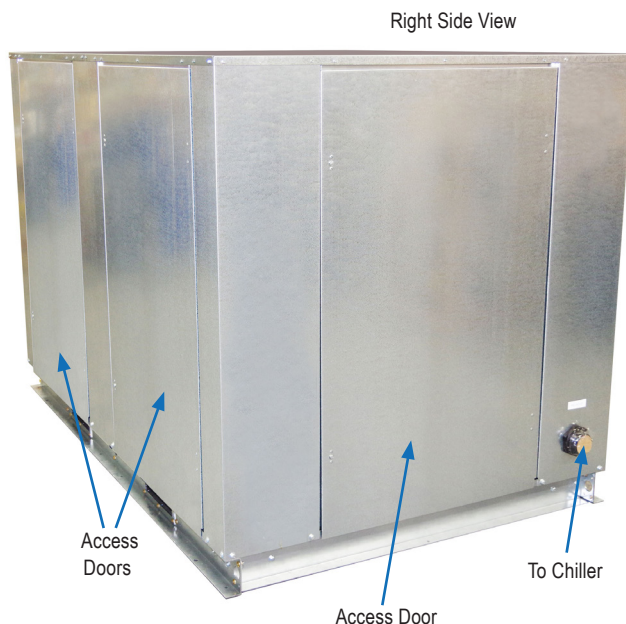

(Polyethylene Tank) Standard Features:


- Open Vented **200 gallon Polyethylene tank**
- 1/2" tank and fluid piping insulation
- Copper & Polypropylene piping
- Galvanized steel sheet metal cabinet
- Hinged removable access panels

Available Options:

- **STAINLESS STEEL SEALED TANK "SS"**
- Fused, **STAINLESS STEEL** process pump
- Dual process pump with manual changeover
- Dual process pump with auto changeover
- Pump suction isolation valve
- **Process Pump VFD Controller**
- **Tank fluid sight glass**
- Tank liquid level indicator with dry contacts
- Low flow by-pass valve
- **Water flow meter**
- Auto city water make up solenoid
- 1" tank and piping insulation in lieu of 1/2"
- Seal-tight electrical conduit and connections
- **Painted - Powder Coated**



J&M FLUIDICS, INC. – PRODUCT DATA SHEET



*It's All about Building a
Better Product for Our Clients!*

J&M Fluidics, Inc.

851 Tech Drive

Telford, PA 18969

Toll-Free: (888) 539-1731



Fax: 267-203-8786

Model: RST200


200 Gallon Storage Tank

Product Dimensional Drawing


© Property of J&M Fluidics, Inc.

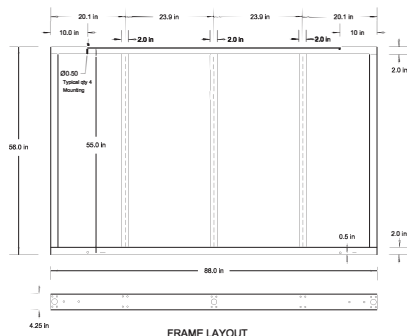


REAR VIEW




TOP VIEW

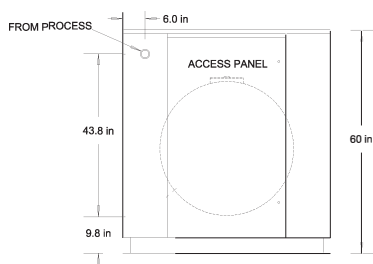

LEFT SIDE



FRONT VIEW



RIGHT SIDE

NOTES:

- 1) CONNECTION SIZE
200 GAL - 2" FPT
300 GAL - 2.5" FPT
- 2) WEIGHT
DRY - 975 Lbs.
OPERATING - 3225 Lbs.

Polyethylene Tank & Pump

Tank Model	Length Inches	Width Inches	Height Inches	Water Conn.	Tank Capacity	Recirculation Pump	FLA 230/3Ø	FLA 460/3Ø	Weight Lbs.
RST200	88	56	60	2" FPT	200 Gallons	NA	NA	NA	445

J&M FLUIDICS, INC. – PRODUCT DATA SHEET