

*It's All about Building a
Better Product for Our Clients!*


J&M Fluidics, Inc.
851 Tech Drive
Telford, PA 18969
Toll-Free: (888) 539-1731
Fax: 267-203-8786

Model: RST300

300 Gallon Storage Tank



1/2" Tank and Fluid
Piping Insulation
(Optional 1" Thickness)

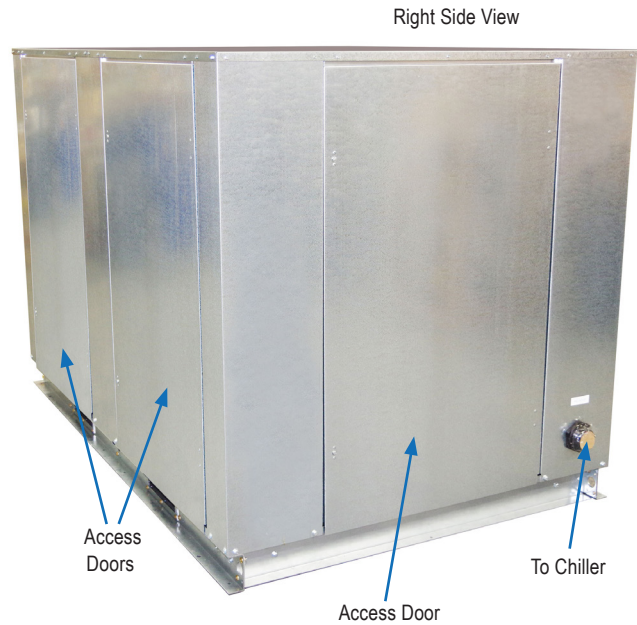

(Polyethylene Tank) Standard Features:

- Open Vented **300 gallon Polyethylene tank**
- 1/2" tank and fluid piping insulation
- Copper & Polypropylene piping
- Galvanized steel sheet metal cabinet
- Hinged removable access panels

Available Options:

- **STAINLESS STEEL SEALED TANK "SS"**
- Fused, **STAINLESS STEEL** process pump
- Dual process pump with manual changeover
- Dual process pump with auto changeover
- Pump suction isolation valve
- **Process Pump VFD Controller**
- **Tank fluid sight glass**
- Tank liquid level indicator with dry contacts
- Low flow by-pass valve
- **Water flow meter**
- Auto city water make up solenoid
- 1" tank and piping insulation in lieu of 1/2"
- Seal-tight electrical conduit and connections
- **Painted - Powder Coated**





It's All about Building a Better Product for Our Clients!

J&M Fluidics, Inc.

851 Tech Drive
Telford, PA 18969

Toll-Free: (888) 539-1731


Fax: 267-203-8786

Model: RST300


300 Gallon Storage Tank

Product Dimensional Drawing


© Property of J&M Fluidics, Inc.

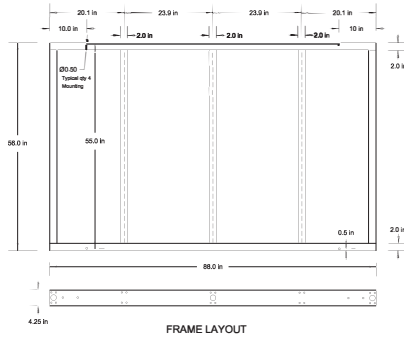


FRAME LAYOUT




REAR VIEW




TOP VIEW

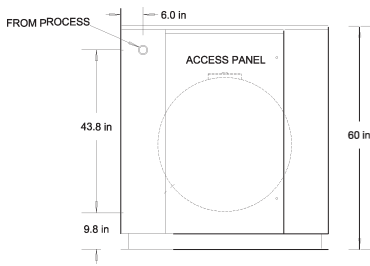

LEFT SIDE



FRONT VIEW



RIGHT SIDE

- NOTES:
1) CONNECTION SIZE
200 GAL - 2" FPT
300 GAL - 2.5" FPT
2) WEIGHT
DRY - 975 Lbs.
OPERATING - 3225 Lbs.

Polyethylene Storage Tank

Tank Model	Length Inches	Width Inches	Height Inches	Water Conn.	Tank Capacity	Recirculation Pump	FLA 230/30	FLA 460/30	Weight Lbs.
RST300	88	56	60	2.5" FPT	300 Gallons	NA	NA	NA	465

J&M FLUIDICS, INC. - PRODUCT DATA SHEET