



It's All about Building a
Better Product for Our Clients!

J&M Fluidics, Inc.
851 Tech Drive
Telford, PA 18969
Toll-Free: (888) 539-1731
Fax: 267-203-8786


Model: PZW7D

Packaged Water-Cooled 7 Ton Chiller

STANDARD ON ALL J&M MODELS:

Pentra Microsmart, Programmable Logic Controller (PLC)
with HMI Touch Screen Display.

Programmable Logic
Controller (PLC)

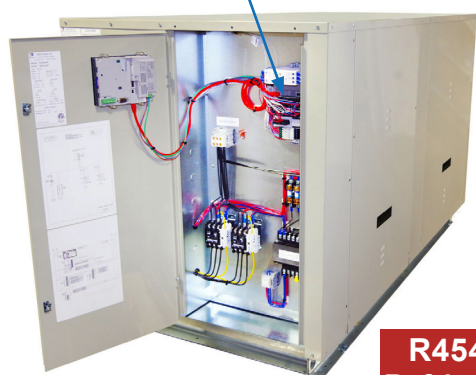

View Showing
Electrical Panel Open

**R454C
Refrigerant**



Front/Side Views

User-Friendly
HMI Touch Screen
Display



Process
Fluid Inlet

Process
Fluid Outlet

Standard Features:

- ETL listed to UL/CSA 60335-2-40
- Single Point Power Connection
- Pentra Microsmart, Programmable Logic Controller (PLC) with easy to use HMI touch screen display
- **STAINLESS STEEL**, brazed plate evaporator
- Scroll compressor with crankcase heater
- Suction Accumulator
- **Water flow switch**
- **Hot Gas Bypass Capacity Control**
- **24V control transformer**
- Control circuit fusing
- Condenser(s): Coaxial up to PZW22D
- Condenser(s): Shell and Tube PZW26D through PZW52D
- Compressor motor contactor
- **Painted - Powder Coated** (up to PZW22D), **galvanized sheet metal cabinet**
- 1/2" insulation on all water and refrigerant lines
- Liquid line drier, sight glass, solenoid, TXV
- Complete refrigerant charge from factory
- **Factory Performance Test prior to shipment**



Options:

- **Copeland Digital Scroll Compressor**
- **Remote Idec touchscreen control panel**
- **Industrial VPN Router**
- **5 Port Ethernet Switch**
- **BacNet Gateway**
- **Process Pump VFD Controller**
- **VFD Compressor Control**
- 4 year extended compressor warranty
- Casters (factory mounted)
- Condenser water regulating valve
- 115 volt (rain tight) service outlet
- Non Fused Disconnect
- Phase Monitor, line voltage monitor offering protection against phase loss/reversal, unbalance and hi/lo voltage
- Compressor fusing
- Compressor Sound Cover
- Factory installed evaporator heat tape freeze protection
- Low flow by-pass valve
- Fused, **STAINLESS STEEL** process pump
- Dual system pump with manual changeover (some models)
- Dual system pump with auto changeover (some models)
- Pump suction isolation valve
- Water pressure gauge set
- Water Flow Meter
- Auto city water changeover panel with filter
- Stainless steel, SCH80 PVC or Polypropylene piping for deionized and reverse osmosis water systems
- Door Mounted HMI with weather proof cover



**Easy to Use
Touch Screen Display
on ALL J&M Chiller
Models**

J&M FLUIDICS, INC. – PRODUCT DATA SHEET



It's All about Building a
Better Product for Our Clients!

J&M Fluidics, Inc.
851 Tech Drive
Telford, PA 18969
Toll-Free: (888) 539-1731
Fax: 267-203-8786


Model: PZW7D

Packaged Water-Cooled 7 Ton Chiller

Product Dimensional Drawing

© Property of J&M Fluidics, Inc.

R454C
Refrigerant

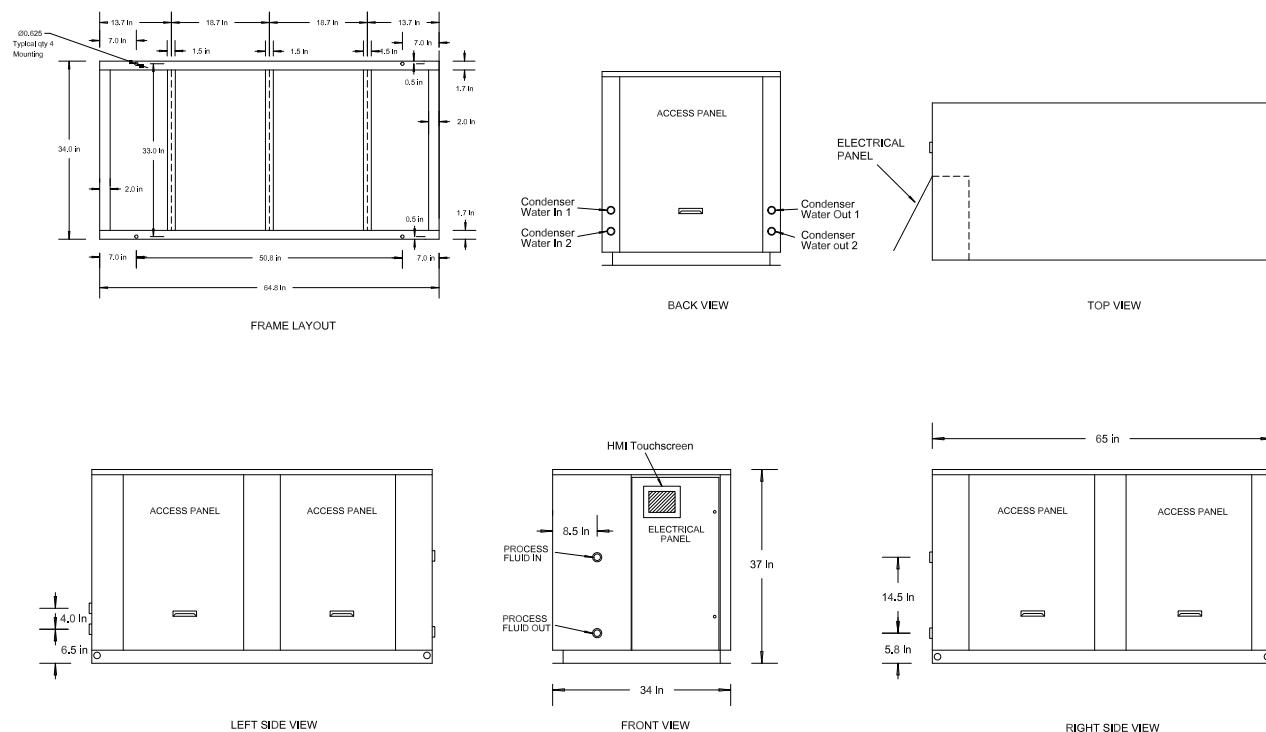

Dimensional & Electrical Table (Dual Circuit)

Chiller Model	Nominal BTUH	Length Inches	Width Inches	Height Inches	Power			Compressor		RLA ea.	LRA ea.	MCA	M.O.P.	Chiller Fluid Conn	Weight Pounds
					Voltage	Phase	Freq.	Qty.	HP						
PZW7DE8	84800	65	34	36	208/230	1	60	2	3.5	23.7	137	53.3	70	1.25 "FPT	725
PZW7DF8					208/230	3	60			18.3	91	41.2	50		
PZW7DH8					460	3	60			7.1	50	16.0	20		
PZW7DI8					575	3	60			5.8	37	13.1	15		

Capacity Table (Refrigerant R454C)

Model	COMPRESSOR	COND(°F)	105		
		LWT (°F)	TONS	KW	EER
7D	YB27KSE	42	6.6	6.1	13.1
		44	6.9	6.1	13.7
		45	7.1	6.1	14.0
		50	7.8	6.1	15.5

- Capacities on this chart are based on refrigerant R454C. Lower leaving water or low ambient can require the use of a glycol solution or other fluid blends. These solutions affect unit capacities. Please consult the factory on these or other special fluids.
- KW input is for compressor(s) only.
- EER = Energy Efficiency Ratio (BTU/watt-hour). Power inputs include compressor (s), condenser fan motor (s) and control power.