




It's All about Building a
Better Product for Our Clients!

J&M Fluidics, Inc.
851 Tech Drive
Telford, PA 18969
Toll-Free: (888) 539-1731
Fax: 267-203-8786

Model: **PZWT13D**

Packaged Water-Cooled 13 Ton Chiller

with Stainless Steel Tank

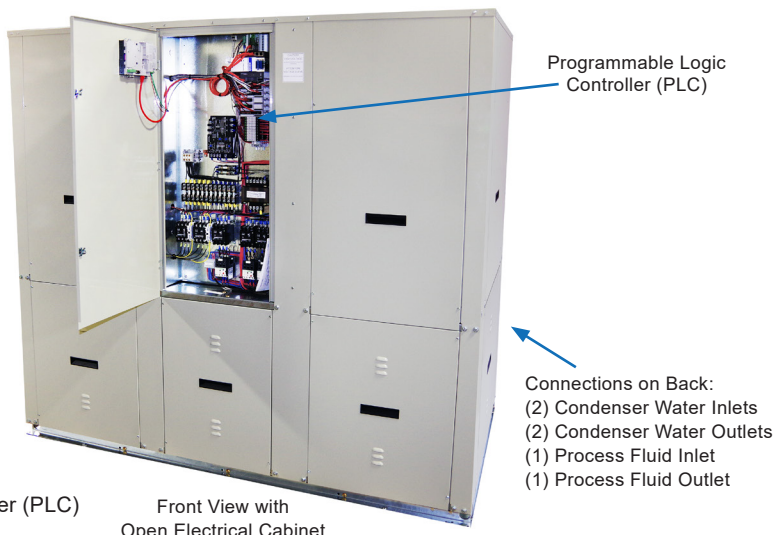

STANDARD ON ALL J&M MODELS:
Pentra Microsmart, Programmable Logic Controller (PLC)
with HMI Touch Screen Display.

Front View with
Open Electrical Cabinet

Connections on Back:
(2) Condenser Water Inlets
(2) Condenser Water Outlets
(1) Process Fluid Inlet
(1) Process Fluid Outlet

Standard Features:

- ETL listed to UL/CSA 60335-2-40
- Single Point Power Connection
- Pentra Microsmart, Programmable Logic Controller (PLC) with easy to use HMI touch screen display
- **STAINLESS STEEL**, brazed plate evaporator
- Scroll compressor with crankcase heater
- Suction Accumulator
- Water flow switch
- Hot Gas Bypass Capacity Control
- 24V control transformer
- Control circuit fusing
- Condenser(s): Coaxial up to PZW22D
- Condenser(s): Shell and Tube PZW26D through PZW52D
- Compressor motor contactor
- **Painted - Powder Coated (Most Models), galvanized sheet metal cabinet**
- 1/2" insulation on all water and refrigerant lines
- Liquid line drier, sight glass, solenoid, TXV
- Complete refrigerant charge from factory
- **Factory Performance Test prior to shipment**



Options:

- Copeland Digital Scroll Compressor
- Remote Idec touchscreen control panel
- Industrial VPN Router
- 5 Port Ethernet Switch
- BacNet Gateway
- Process Pump VFD Controller
- VFD Compressor Control
- 4 year extended compressor warranty
- Casters (factory mounted)
- Condenser water regulating valve
- 115 volt (rain tight) service outlet
- Non Fused Disconnect
- Phase Monitor, line voltage monitor offering protection against phase loss/reversal, unbalance and hi/lo voltage
- Compressor fusing
- Compressor Sound Cover
- Factory installed evaporator heat tape freeze protection
- Low flow by-pass valve
- Fused, **STAINLESS STEEL** process pump
- Dual system pump with manual changeover (some models)
- Dual system pump with auto changeover (some models)
- Pump suction isolation valve
- Water pressure gauge set
- Water Flow Meter
- Auto city water changeover panel with filter
- Tank City Water Makeup
- Stainless steel, SCH80 PVC or Polypropylene piping for deionized and reverse osmosis water systems
- Door Mounted HMI with weather proof cover

Tank

- **STAINLESS STEEL** storage tank with 1/2 inch insulation
- Fused, **STAINLESS STEEL** re-circulation pump for tank operation with ball valve and cleanable strainer
- Tank pressure relief valve, vent and drain hose bibs



**Easy to Use
TouchScreen Display
on ALL J&M Chiller
Models**

Tank Options

- Storage tank sight glass
- Tank low liquid level indicator with dry contacts

J&M FLUIDICS, INC. – PRODUCT DATA SHEET



It's All about Building a
Better Product for Our Clients!

J&M Fluidics, Inc.
851 Tech Drive
Telford, PA 18969

Toll-Free: (888) 539-1731
Fax: 267-203-8786

Model: PZWT13D







Packaged Water-Cooled 13 Ton Chiller

Product Dimensional Drawing

© Property of J&M Fluidics, Inc.

with Stainless Steel Tank

**R454C
Refrigerant**

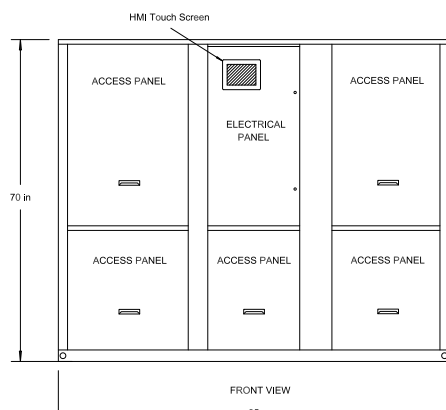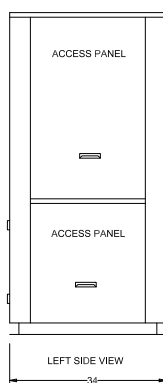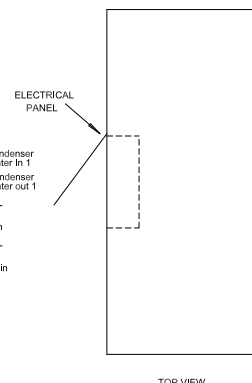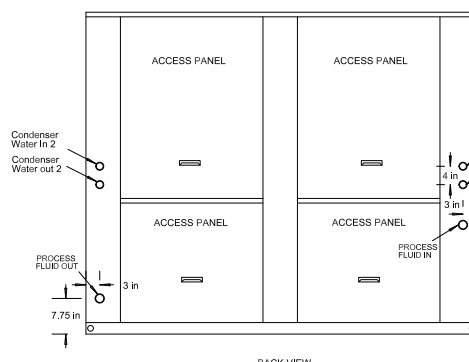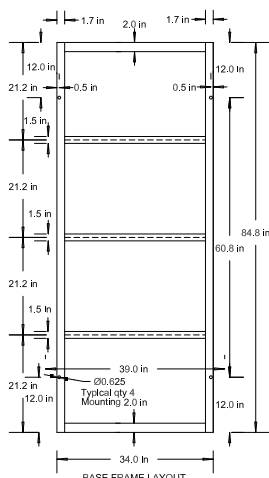

Dimensional & Electrical Table (Dual Circuit)

Chiller Model	Nominal BTUH	Length Inches	Width Inches	Height Inches	Power			Compressor		RLA ea.	LRA ea.	Recirculation Pump FLA	MCA	M.O.P.	Reservoir Gal.	Chiller Fluid Conn	Weight Pounds
					Voltage	Phase	Freq.	Qty.	HP								
PZWT13DF8					208/230	3	60			31.9	224	5	76.8	100			
PZWT13DH8	150400	85	34	70	460	3	60	2	6.5	12.6	99	2.5	30.9	40	80	1.5 "FPT	1300
PZWT13DI8					575	3	60			10.3	82.4	1.69	24.9	35			

Capacity Table (Refrigerant R454C)

Model	COMPRESSOR	COND(°F)	105		
		LWT (°F)	TONS	KW	EER
13D	YB50KAE	42	11.8	11.6	12.2
		44	12.3	11.6	12.7
		45	12.5	11.6	12.9
		50	13.3	11.7	13.7

- Capacities on this chart are based on refrigerant R454C. Lower leaving water or low ambient can require the use of a glycol solution or other fluid blends. These solutions affect unit capacities. Please consult the factory on these or other special fluids.
- KW input is for compressor(s) only.
- EER = Energy Efficiency Ratio (BTU/watt-hour). Power inputs include compressor (s), condenser fan motor (s) and control power.