FLUIDICS

It's All about Building a Better Product for Our Clients!

J&M Fluidics, Inc.
851 Tech Drive
Telford, PA 18969
Toll-Free: (888) 539-1731
Fax: 267-203-8786

Model: PZW15D

Packaged Water-Cooled 15 Ton Chiller

STANDARD ON ALL J&M MODELS:
Pentra Microsmart, Programmable Logic Controller (PLC) with HMI Touch Screen Display.

R454C Refrigerant

View Showing Electrical Panel Open

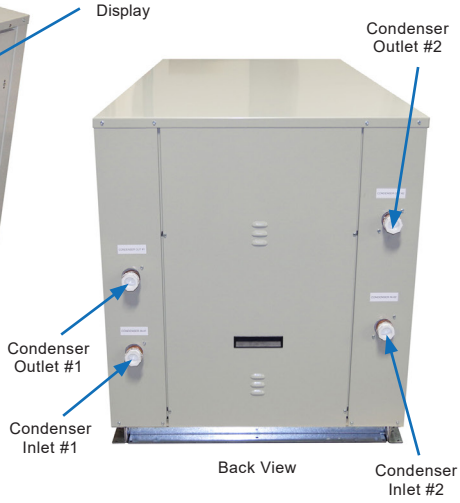

Back View

Standard Features:

- **Conforms to UL 60335-2-40:2022 Ed.4 UL 60335-1:2016 Ed.6**
- **CSA C22.2 # 60335-1:2016 Ed.2**
- **CSA C22.2 # 60335-2-40:2022 Ed.4**
- **Single Point Power Connection**
- **Pentra Microsmart, Programmable Logic Controller (PLC) with easy to use HMI touch screen display**
- **STAINLESS STEEL**, brazed plate evaporator
- Scroll compressor with crankcase heater
- Suction Accumulator
- Liquid line drier, sight glass, solenoid
- Electronic expansion valve
- Manual high pressure cutout
- **Water flow switch**
- **Hot Gas Bypass Capacity Control**
- **24V control transformer**
- Control circuit fusing
- Condenser(s): Coaxial up to PZW22D
- Condenser(s): Shell and Tube on units larger than 22 ton
- Compressor motor contactor
- **Painted - Powder Coated** (up to PZW22D), **galvanized sheet metal cabinet**
- 1/2" insulation on all water and refrigerant lines
- Complete refrigerant charge from factory
- **Factory Performance Test prior to shipment**

C ETL LISTED US
Intertek

Options:

- **VFD Compressor Control**
- **Copeland Digital Scroll Compressor**
- **Remote Idec touchscreen control panel**
- **5 Port Ethernet Switch**
- **BacNet Gateway**
- **Process Pump VFD Controller**
- 4 year extended compressor warranty
- Casters (factory mounted)
- Condenser water regulating valve
- 115 volt (rain tight) service outlet
- Non Fused Disconnect
- Phase Monitor, line voltage monitor offering protection against phase loss/reversal, unbalance and hi/lo voltage
- Compressor fusing
- Compressor Sound Cover
- Factory installed evaporator heat tape freeze protection
- Low flow by-pass valve
- Fused, STAINLESS STEEL process pump
- Dual system pump with manual changeover (some models)
- Dual system pump with auto changeover (some models)
- Pump suction isolation valve
- Water pressure gauge set
- Water Flow Meter
- Auto city water changeover panel with filter
- Stainless steel, SCH80 PVC or Polypropylene piping for deionized and reverse osmosis water systems
- Door Mounted HMI with weather proof cover

J&M FLUIDICS, INC. – PRODUCT DATA SHEET

© Property of J&M Fluidics, Inc.

FLUIDICS

It's All about Building a Better Product for Our Clients!

J&M Fluidics, Inc.
851 Tech Drive
Telford, PA 18969
Toll-Free: (888) 539-1731
Fax: 267-203-8786

Model: PZW15D

Packaged Water-Cooled 15 Ton Chiller

Product Dimensional Drawing

© Property of J&M Fluidics, Inc.

R454C Refrigerant

Intertek

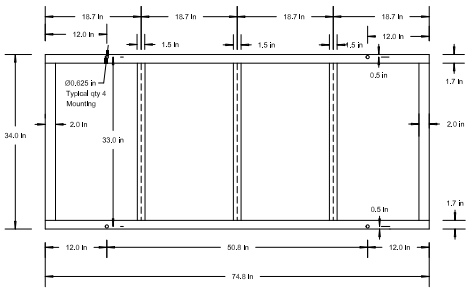

FRAME LAYOUT

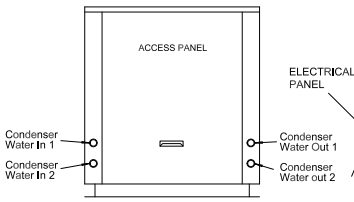

BACK VIEW

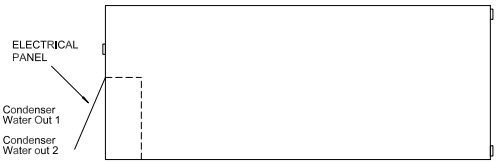

TOP VIEW

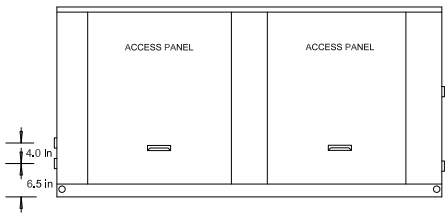

LEFT SIDE VIEW



FRONT VIEW

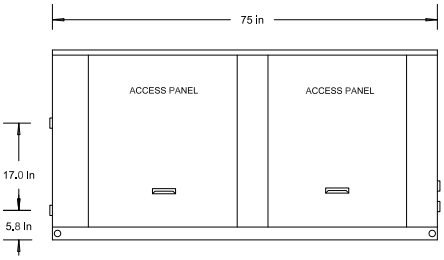

RIGHT SIDE VIEW

Dimensional & Electrical Table (Dual Circuit)

Chiller Model	Nominal BTUH	Length Inches	Width Inches	Height Inches	Power			Compressor Qty.	RLA ea.	LRA ea.	MCA	MOP	Chiller Fluid Conn	Weight Pounds
					Voltage	Phase	Freq.							
PZW15DF8	182600	75	34	36	208/230	3	60	2	35.3	225	79	110	1.25 "FPT	965
PZW15DH8					460	3	60		15.4	114	35	50		
PZW15DI8					575	3	60		12.8	80	29	40		

Capacity Table (Refrigerant R454C)

Model	COMPRESSOR	COND(°F)	105		
		LWT (°F)	TONS	KW	EER
15D	YB56KAE	42	14.3	13.3	12.9
		44	14.9	13.4	13.4
		45	15.2	13.4	13.6
		50	16.8	13.5	15.0

1. Capacities on this chart are based on refrigerant R454C. Lower leaving water or low ambient can require the use of a glycol solution or other fluid blends. These solutions affect unit capacities. Please consult the factory on these or other special fluids.
2. KW input is for compressor(s) only.
3. EER = Energy Efficiency Ratio (BTU/watt-hour). Power inputs include compressor (s), condenser fan motor (s) and control power.

J&M FLUIDICS, INC. – PRODUCT DATA SHEET

© Property of J&M Fluidics, Inc.