



*It's All about Building a
Better Product for Our Clients!*

J&M Fluidics, Inc.
851 Tech Drive
Telford, PA 18969
Toll-Free: (888) 539-1731
Fax: 267-203-8786

Model: PZAT15D

Packaged Air-Cooled 15 Ton Chiller

STANDARD ON ALL J&M MODELS:
Pentra Microsmart, Programmable Logic Controller
(PLC) with HMI Touch Screen Display.
(Located inside front electrical cabinet)

with Stainless Steel Tank



Side/Front View

Electrical
Cabinet

Process
Fluid Inlet &
Outlet
located on
back



Front View

**R454A
Refrigerant**

Standard Features:

- Conforms to UL 60335-2-40:2022 Ed.4
UL 60335-1:2016 Ed.6
- CSA C22.2 # 60335-1:2016 Ed.2
- CSA C22.2 # 60335-2-40:2022 Ed.4
- Single point power connection
- Pentra Microsmart, Programmable Logic Controller (PLC)
with easy to use HMI touch screen display
- **STAINLESS STEEL**, brazed plate evaporator
- Scroll compressor with crankcase heater
- Suction accumulator
- Liquid line drier, sight glass, solenoid
- Electronic expansion valve
- Manual high pressure cutout
- Water flow switch
- Hot gas by-pass capacity control
- 24V control transformer
- Direct drive condenser fan motor
- Rust resistant, high CFM, aluminum condenser fan blade
- Condenser(s): copper tube/aluminum fin
- Compressor motor contactor
- Condenser motor and control circuit fusing
- Painted (Powder Coated), galvanized
sheet metal cabinet
- 1/2" insulation on all water and Low pressure refrigerant lines
- Complete refrigerant charge from factory
- Factory Performance Test prior to shipment



Options:

- VFD Compressor Control (*Hot Gas Bypass Removed*)
- Copeland Digital Scroll Compressor
(*Hot Gas Bypass Removed*)
- Remote Idec touchscreen control panel
- 5 Port Ethernet Switch
- BacNet Gateway
- **STAINLESS STEEL** Process Pump
- Process Pump VFD Controller
- 4 year extended compressor warranty
- Casters (factory mounted)
- 115 volt (rain tight) service outlet
- Non Fused Disconnect
- Phase/voltage monitor
- Compressor fusing
- Compressor Sound Cover
- Flooded cond. w/receiver/head pressure control (0°F)
- Flooded cond. w/**Heated** receiver/head pressure
control (-20°F)
- Dual process pumps with auto changeover
- Pump suction isolation valve(s)
- Water pressure gauge set
- Coastal powder coat paint protection
- E-Coat Condenser Coil (coastal protection)
- Water Flow Meter
- Auto city water make up solenoid & auto level switch
- Auto city water changeover panel with filter
- Door Mounted HMI with weather proof cover



*It's All about Building a
Better Product for Our Clients!*

J&M Fluidics, Inc.

851 Tech Drive
Telford, PA 18969

Toll-Free: (888) 539-1731

Fax: 267-203-8786

Model: PZAT15D







Packaged Air-Cooled 15 Ton Chiller

Product Dimensional Drawing

© Property of J&M Fluidics, Inc.

with Stainless Steel Tank

R454A
Refrigerant

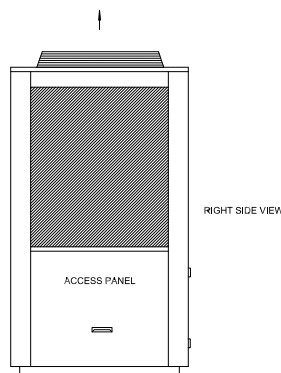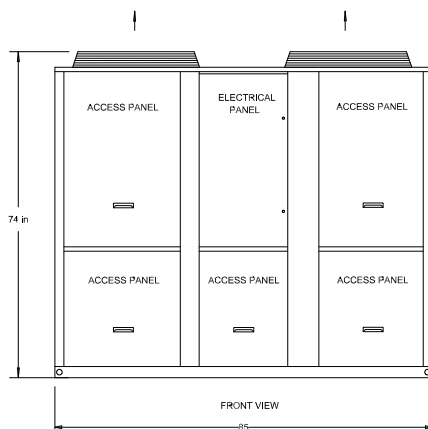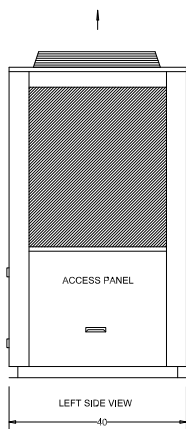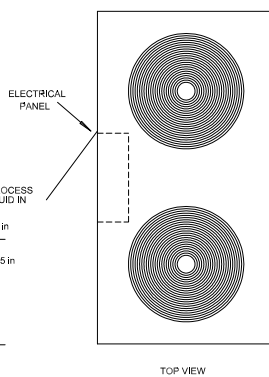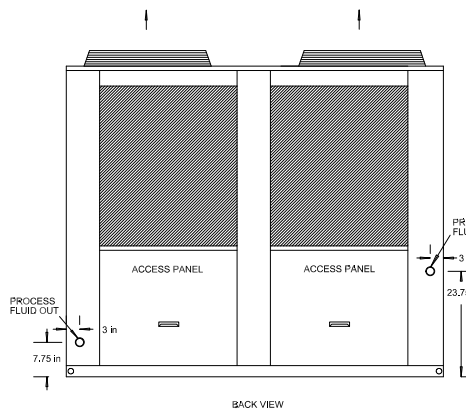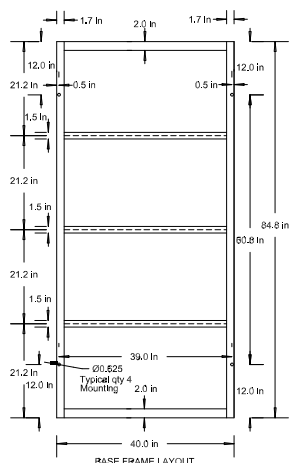

Dimensional & Electrical Table (Dual Circuit)

Chiller Model	Nominal BTUH	Length Inches	Width Inches	Height Inches	Power			Compressor Qty.	RLA ea.	LRA ea.	Fan Motor		Recirculation Pump FLA	MCA	MOP	Reservoir Gal.	Chiller Fluid Conn	Weight Pounds
					Voltage	Phase	Freq.				Qty.	FLA ea.						
PZAT15DF7	174000	85	40	76	208/230	3	60	2	30.8	195	2	3.8	4.66	82	110	120	1.5 "FPT	1300
PZAT15DH7					460	3	60					1.5	2.11	41	50			
PZAT15DI7					575	3	60					1.72	1.69	33	40			

Capacity Table (Refrigerant R454A)

Model	COMPRESSOR	AMB (°F)	80			90			95			100			105		
		LWT (°F)	TONS	KW	EER	TONS	KW	EER	TONS	KW	EER	TONS	KW	EER	TONS	KW	EER
15D	YB51KAE	42	15.0	14.2	12.7	14.1	15.6	10.8	13.6	16.4	10.0	13.1	17.2	9.2	12.7	18.1	8.4
		44	15.7	14.2	13.2	14.7	15.7	11.3	14.2	16.4	10.4	13.7	17.3	9.5	13.2	18.2	8.7
		45	16.0	14.2	13.5	15.0	15.7	11.5	14.5	16.5	10.6	14.0	17.3	9.7	13.5	18.2	8.9
		50	17.0	14.3	14.3	16.0	15.7	12.2	15.4	16.5	11.2	14.9	17.4	10.3	14.4	18.3	9.4

- Capacities on this chart are based on refrigerant R454A. Lower leaving water or low ambient can require the use of a glycol solution or other fluid blends. These solutions affect unit capacities. Please consult the factory on these or other special fluids.
- KW input is for compressor(s) only.
- EER = Energy Efficiency Ratio (BTU/watt-hour). Power inputs include compressor (s), condenser fan motor (s) and control power.